


 Available Colors
 Pantone 8405C

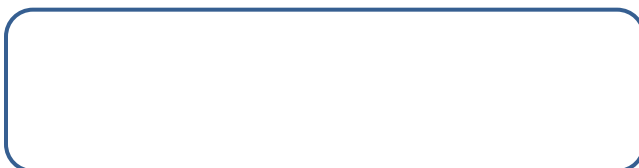

 High Efficiency

Features & Benefits

- Standard 19" rackmount 1RU chassis compatible
- High-efficiency of air inlet/outlet design
- LED display monitoring fan status
- Input 90~264VAC@43-63Hz with PFC Function

SPECIFICATIONS

Form Factor (H) x (W) x (D)	1RU, 19" Rackmount Chassis 1.75" x 16.93" x 15.59" 44.4 mm x 430 mm x 396 mm
Fan Module	6x 97 mm Blower Fan 30.5 CFM per Blower Fan 55.8 dBA per Blower Fan
Control Panel	1x System Power Button
Indicator	1x Power Status LED 6x Fan Status LED
Electrical Requirement	W/ PFC, AC 90~264V Full Range, 47Hz~63Hz
Environmental	Operating: 10°C~35°C (50°F~94.9°F) Non-operating: -40°C~70°C (-40°F~158°F), 5% ~85% Non-condensing
Weight	7kg (15Ibs)



INISTOR Headquarter

Address: 5F., No.252, Sec.2, New Taipei Blvd., San Chong Dist., New Taipei City 241, Taiwan, R.O.C.

Tel: +886-2-2995-1439 Fax: +886-2-2995-7705

 E-mail: sales@inistor.com