




Rackmount Chassis 2U06MFC

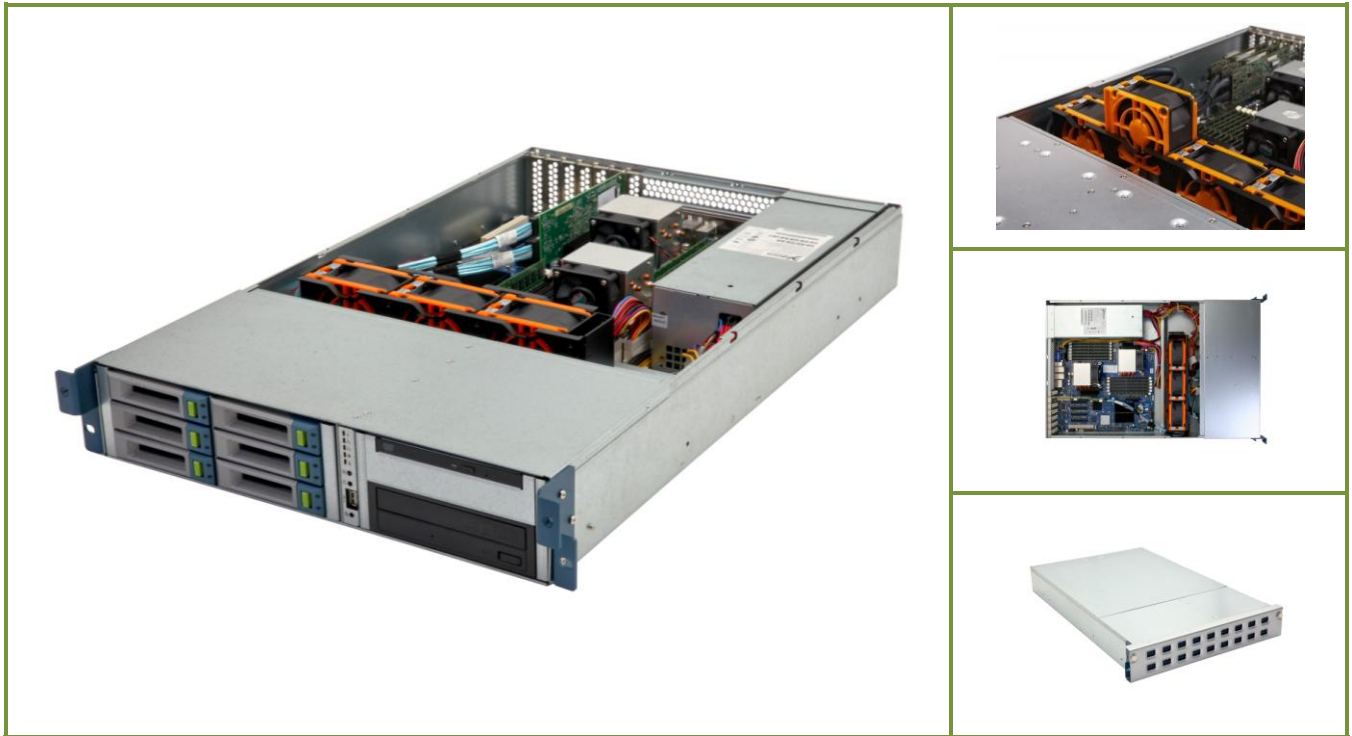


Available Colors:
Pantone 8483C

Features & Benefits

- Excellent anti-vibration HDD drive bays and fan module design
- High-efficiency 720w (1+1) redundant power supply
- Support up to 6.0 Gbps SAS/SATA
- Support up to SSI EEB 12" x 13" compliant motherboards
- Fully utilized space to support 6 x 3.5" hot-swap HDD and 2 x 2.5" Internal HDD
- 4 x 8cm hot-swappable system cooling fan modules
- EMCU provides audible alarm and LED function
- Excellent anti-vibration mechanical design and thermal solution
- Outstanding wire-less design

SPECIFICATIONS

Form Factor (H) x (W) x (D)	2RU 6-Bay, 19" Rackmount Chassis 3.47" x 17.2" x 27.47" 88.1 mm x 437 mm x 697.7 mm
Drive Bay	6x 3.5" Hot Swappable and Anti-Vibration HDD Caddy 1x 2.5" Internal Anti-Vibration HDD Bracket (Support 2x 2.5" HDD) 1x Anti-Vibration Slim Type ODD (Option) 1x Anti-Vibration 5.25" ODD (Option)
Mother Board	Up to SSI EEB 12" x 13" (305 mm x 330 mm)
Processor	Dual or Single Intel® or AMD® Processors
Control Panel	1x System Power Button 1x System Reset Button 1x Alarm Release Button 1x USB 2.0 Port
Indicator	1x Power Status LED 2x Network Activity LEDs 1x Overheat LED 1x Fan Failed LED 1x HDD Status LED per HDD 1x HDD Failed LED per HDD 1x Fan Operated LED per Fan Module 1x Fan Failed LED per Fan Module
Expansion Slots	7x Low Profile Expansion Slot or 3x Standard Expansion Slot
Expander Backplane	3x 3.5" 6Gbps SAS/SATA HDD Backplane SAS/SATA 7pin Connector
Fan Module	4x 80 mm Hot Swappable Fan Modules
Electrical Requirement	High-efficiency 720w (1+1) Redundant Power Supply W/ PFC, AC 90~264V Full Range, 47Hz~63Hz
Management	Overheat Monitoring and Warning System Fan Module Status Monitoring and Warning Power Supply Unit Status Monitoring and Warning HDD Status Monitoring and Warning
Environmental	Operating: 10°C~35°C (50°F~94.9°F) Non-operating: -40°C~70°C (-40°F~158°F), 5% ~85% Non-condensing

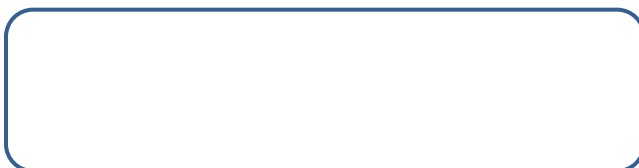

INISTOR Headquarter

Address: 5F., No.252, Sec.2, New Taipei Blvd., San Chong Dist., New Taipei City 241, Taiwan, R.O.C.

Tel: +886-2-2995-1439 Fax: +886-2-2995-7705

E-mail: sales@inistor.com