




Available Colors
Pantone Black C

Features & Benefits

- High-efficiency 520w (1+1) redundant power supply
- Support up to 6.0 Gbps SAS/SATA
- Support up to SSI EEB 12" x 13" compliant motherboard
- Fully utilized space to support 8x 3.5" hot-swap HDD
- 4x 80 mm Hot-swappable system cooling fan module
- EMCU provides audible alarm and LED function
- Excellent anti-vibration mechanical design and thermal solution
- Outstanding wire-less design

SPECIFICATIONS

| | |
|-----------------------------------|--|
| Form Factor (H) x (W) x (D) | 3RU 8-Bay, 19" Rackmount Chassis 5.19" x 17.2" x 25.38" 131.7 mm x 437 mm x 644.7 mm |
| Drive Bay | 8x 3.5" Hot Swappable HDD Caddy 1x 3.5" Internal HDD Bracket (Support 2x 3.5" HDD) 2x 5.25" ODD (Option) 1x Ultra Slim Type ODD (Option) 1x Slim Type FDD (Option) |
| Mother Board | Up to SSI EEB 12" x 13" (305 mm x 330 mm) |
| Processor | Dual or Single Intel® or AMD® Processors |
| Control Panel | 1x System Power Button 1x System Reset Button 1x Alarm Release Button 1x USB 2.0 Port |
| Indicator | 1x Power Status LED 2x Network Activity LED 1x Overheat LED 1x Fan Failed LED 1x HDD Status LED per HDD 1x HDD Failed LED per HDD 1x Fan Operated LED per Fan Module 1x Fan Failed LED per Fan Module |
| Expansion Slot | 7x Standard Expansion Slot |
| Expander Backplane | 2x 3.5" 6Gbps SAS/SATA HDD Backplane mini SAS Connector (SFF-8087 including SGPIO) |
| Fan Module | 4x 80 mm Hot Swappable Fan Module |
| Electrical Requirement | High-efficiency 520w (1+1) Redundant Power Supply W/ PFC, AC 90~264V Full Range, 47Hz~63Hz |
| Environmental | Operating: 10°C~35°C (50°F~94.9°F) Non-operating: -40°C~70°C (-40°F~158°F), 5% ~85% Non-condensing |
| Monitor and Alarm | Overheat Monitoring and Warning System Fan Module Status Monitoring and Warning Power Supply Unit Status Monitoring and Warning HDD Status Monitoring and Warning |
| Weight | Enclosure: 19kg (42Ibs) Packaged: 27kg (60Ibs) (Hard Drive and Slide Rail Not Included) |
| Package Dimension (H) x (W) x (D) | 360 mm x 591 mm x 881 mm |

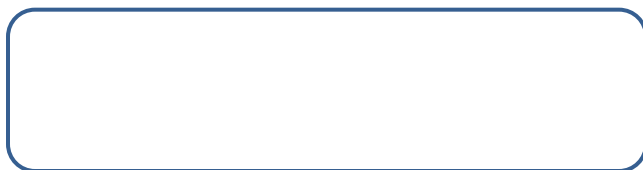

INISTOR Headquarter

Address: 5F., No.252, Sec.2, New Taipei Blvd., San Chong
Dist., New Taipei City 241, Taiwan, R.O.C.

Tel: +886-2-2995-1439 Fax: +886-2-2995-7705

E-mail: sales@inistor.com